




## Controler panou solar 12/24V 60A mini dual USB

kategoria: Kategorie > SOLAR System

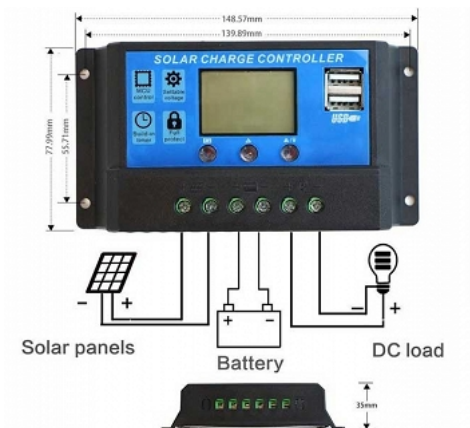

Kod QR:



*PWM* only charge for 12V 24V lead acid battery (automatic identification)

### **Description:**

	PWM10	PWM20	PWM30	PWM40	PWM50	PWM
Charging Current	10A	20A	30A	40A	50A	
Discharging Current	10A	20A	30A	20A	30A	
Max Solar input	46V(for 24V battery) 23V(for 12V battery)					
Equalization	14.4V(Sealed) 14.2V(Gel) 14.6V(Flood)					
Float charge	13.7V(defaul,adjustable)					
Discharge stop	10.7V(defaul,adjustable)					
Discharge reconnect	12.6V(defaul,adjustable)					
USB output	<b>5V/3A max</b>					
Mounting holespacing	147mm*60mm					
Dimensions	133*70*35mm					
Packing Size	150*80*40mm					
Packing Weight	<b>170g</b>					
Self-consum	<10mA					
Operating temperature	-35°C~+60°C					
Installation linewidth	≤5#AWG(6mm <sup>2</sup> )					
Storage temperature	-40~-70?					

### **Note:**

Connect BATTERY FIRST, then Connect LOAD and SOLAR PANEL. It will help the controller

*recognize the battery voltage.*

*When you Disconnect the controller, please remove the SOLAR PANEL, and LOAD, then remove the BATTERY.*